


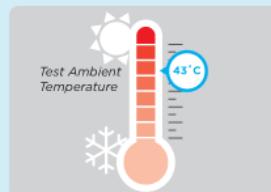

FEATURES

**Strong Refrigeration**

Designed to operate in tropicalised 43°C ambient conditions.

**Auto-close within 45°**

Automatically door-closing design with 700,000 tests.

**Drain Heater**


Standard easy install drain pan for upright models & built-in for undercounter models.

**Compact Refrigeration Unit****Front-in & Front-out air flow**

No need to leave space on the back.

**Easy Cleaning**

Removable door gaskets for easy cleaning without tools.

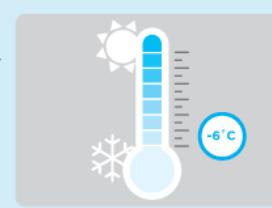
**Digital Display****Better Cooling Capability**




-6°C refrigerator &
-23°C freezer.

**Hygienic Design**




Dished stainless interior and base with rounded edges for easy cleaning.

CUSTOM MADE ITEMS

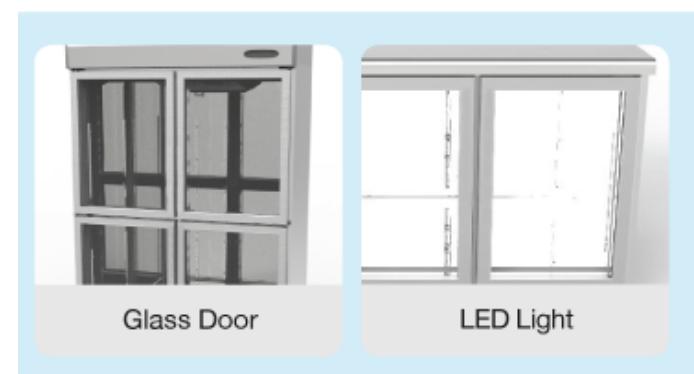

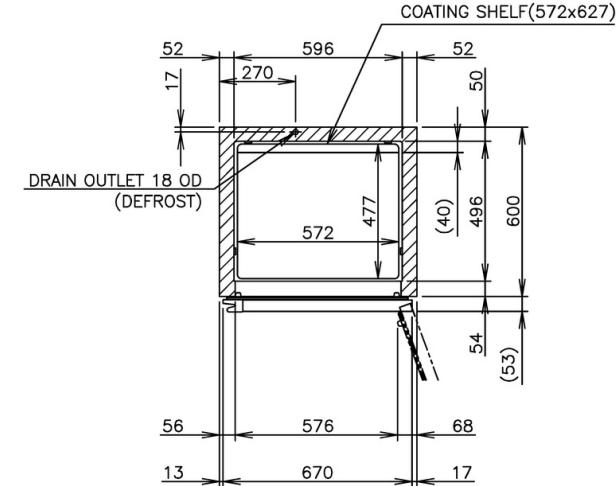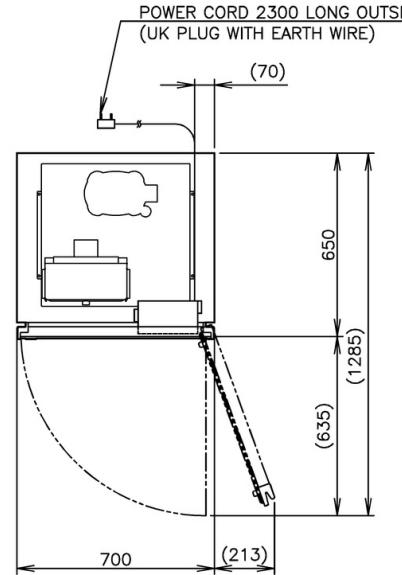

UK PLUG

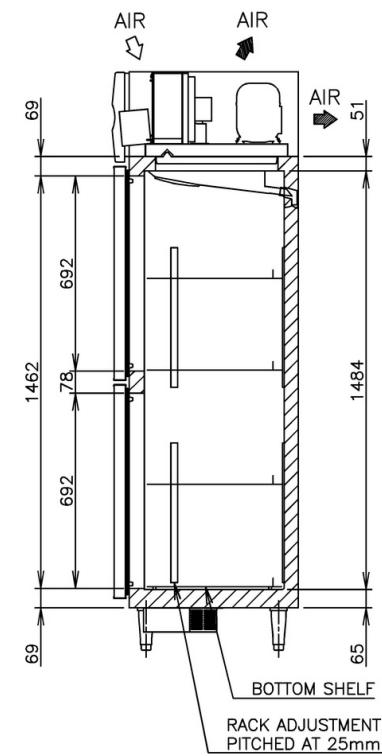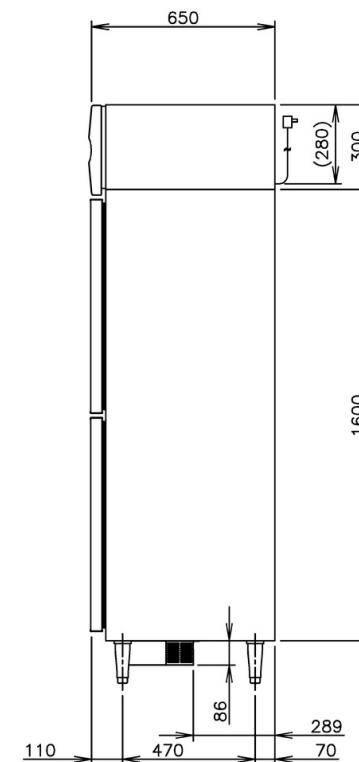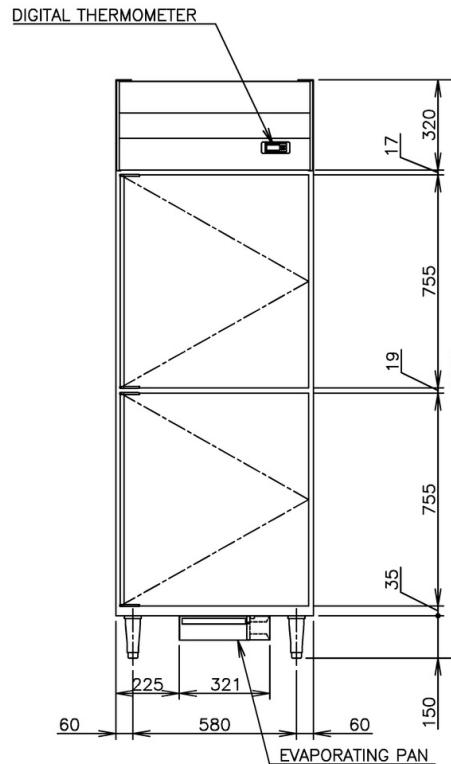

ITEM	Hoshizaki Reach-in Freezer
MODEL	HF-76MA-S
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.65kVA (3.0A)
AMPERAGE	Rated: 3.3A Starting: 10.7A
ELECTRIC CONSUMPTION	419W (Power Factor: **%) Heater: 426W Defrost: 426W
HEAT REJECTION	670W
POWER CORD	2.3m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	467L
OUTSIDE DIMENSIONS	700mm(W) x 650mm(D) x 2050(-2080)mm(H)
INSIDE DIMENSIONS	596mm(W) x 496mm(D) x 1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)
INTERIOR	Stainless Steel, ABS Plastic(Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic 480W
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -23 to -7°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)
LEG	Plastic Adjustable from 150 to 180mm
SHELF	4 pcs.
WEIGHT	106kg (Gross 128kg)
PACKAGE	Carton (Wooden Pallet) 760mm(W) x 750mm(D) x 2075mm(H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage $\pm 6\%$







*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
2. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
3. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: R567-C108 (HS)

*CUSTOMIZED
DEEP; D=650mm

HOSHIZAKI REACH-IN FREEZER HF-76MA-S

APPROVED KAWAKAMI	CHECKED WANG	DESIGNED LIANG	DRAWN KAWAKAMI	SCALE 1/20	TRIGONOMETRY
*	*	△	*****	DATE 2018.11.17	DRAWING NO. D23978 SYMBOL △

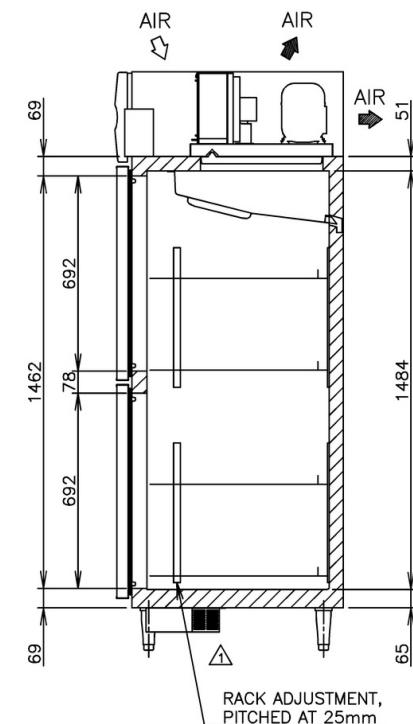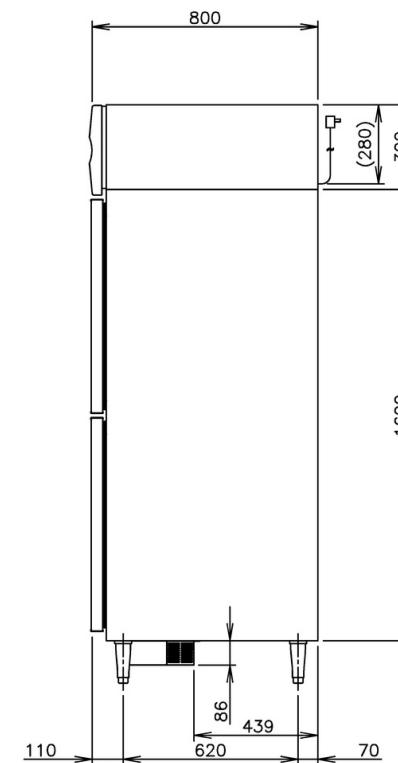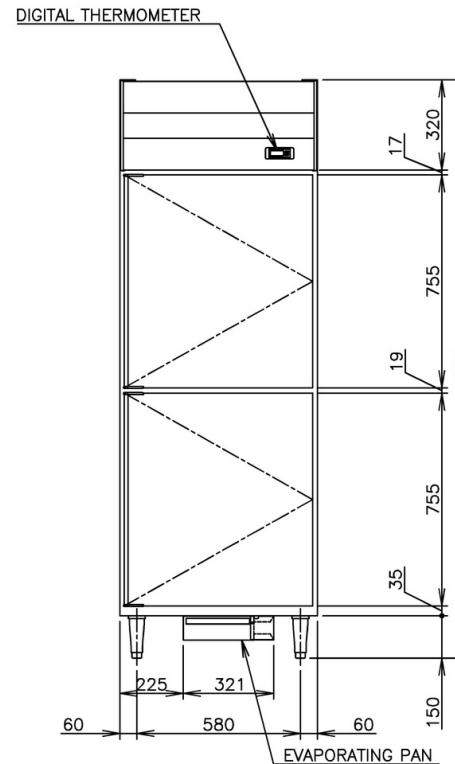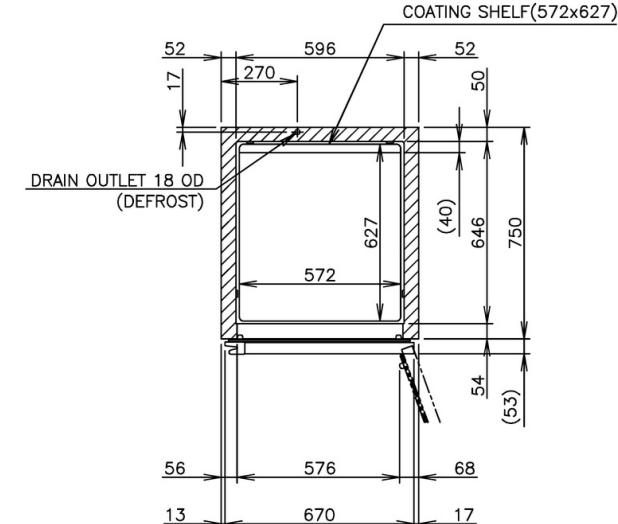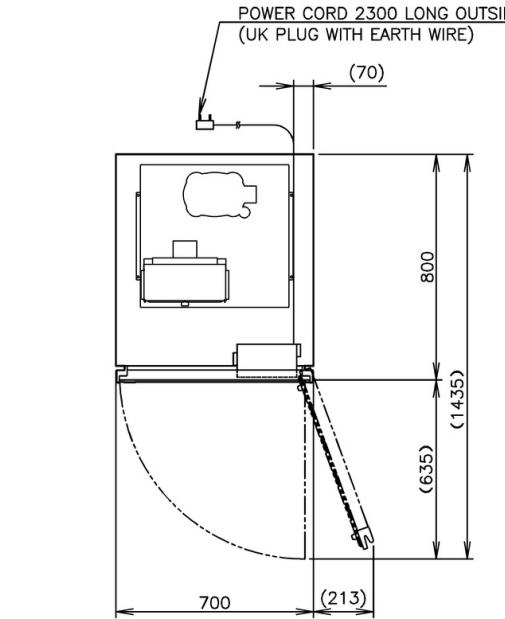

ITEM	Hoshizaki Reach-in Freezer
MODEL	HF-78MA-S
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.56kVA (2.53A)
AMPERAGE	Rated: 4.1A Starting: 8.5A
ELECTRIC CONSUMPTION	469W Heater: 426W Defrost: 426W
HEAT REJECTION	*W
POWER CORD	2.3m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	569L
OUTSIDE DIMENSIONS	700mm(W) x 800mm(D) x 2050(-2080)mm(H)
INSIDE DIMENSIONS	596mm(W) x 646mm(D) x 1484mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Top, Rear, Bottom)
INTERIOR	Stainless Steel, ABS Plastic(Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor (Digital Temp. Indication) Adjustable from -23 to -7°C
DEFROST CONTROL	Microprocessor
ELECTRIC CIRCUIT PROTECTION	Earth Wire, Circuit Breaker
REFRIGERANT CIRCUIT PROTECTION	Motor Protector (Auto-reset)
LEG	Plastic Adjustable from 150 to 180mm
SHELF	6 pcs.
WEIGHT	104kg (Gross 126kg)
PACKAGE	Carton (Wooden Pallet) 760mm(W) x 900mm(D) x 2075mm(H)
ACCESSORIES	Drain Hose x 1, Drain Pan x 1
OPERATING CONDITIONS	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C.
3. Product Code: R594-C100 (HS)

HOSHIZAKI REACH-IN FREEZER HF-78MA-S

APPROVED	CHECKED	DESIGNED	DRAWN	SCALE	TRIGONOMETRY
KAWAKAMI	WANG	LIANG	SHAN	1/20	
KAWAKAMI APPROVED	WANG DESIGNED	LIANG SYMBOL	SHAN DATE	2019.07.26 2019.06.06	DRAWING NO. D25225
					SYMBOL 1