


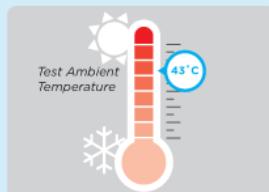

## FEATURES

**Strong Refrigeration**

Designed to operate in tropicalised 43°C ambient conditions.

**Auto-close within 45°**

Automatically door-closing design with 700,000 tests.

**Drain Heater**


Standard easy install drain pan for upright models & built-in for undercounter models.

**Compact Refrigeration Unit****Front-in & Front-out air flow**

No need to leave space on the back.

**Easy Cleaning**

Removable door gaskets for easy cleaning without tools.

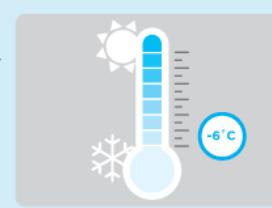**Digital Display****Better Cooling Capability**

-6°C refrigerator &  
-23°C freezer.

**Hygienic Design**

Dished stainless interior and base with rounded edges for easy cleaning.

## CUSTOM MADE ITEMS



All Left / Right Hinge Door




Back Guard



Pass Through Doors









Table Top Opening

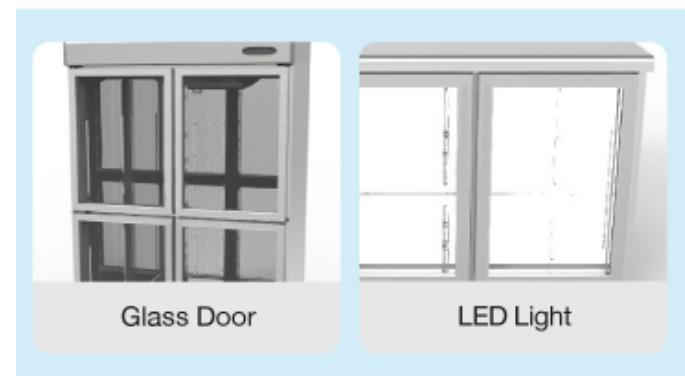

Glass Door



LED Light

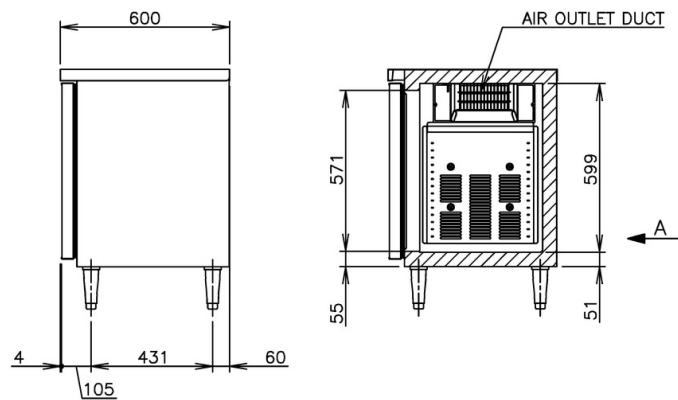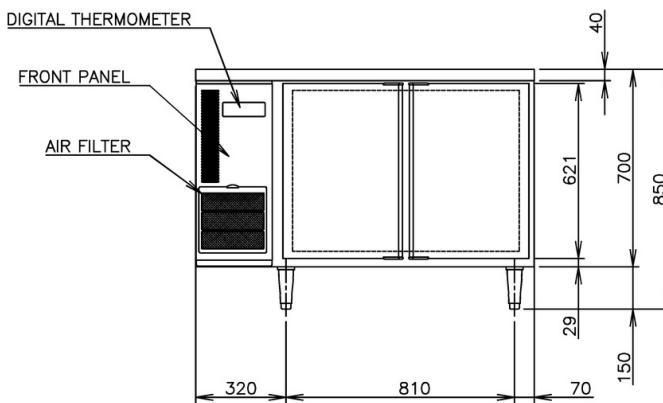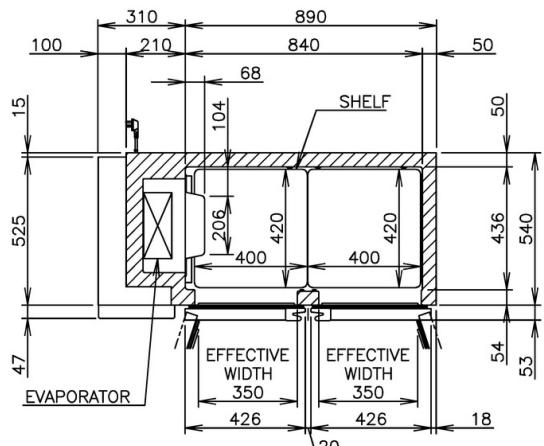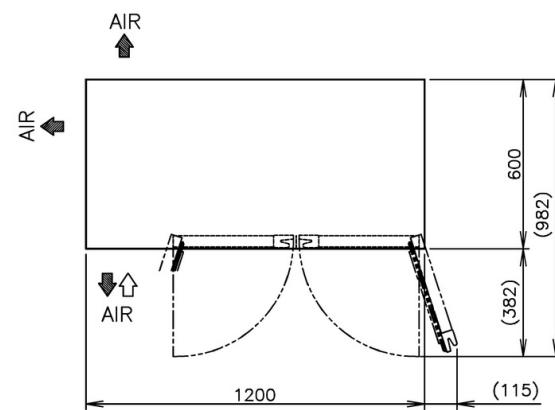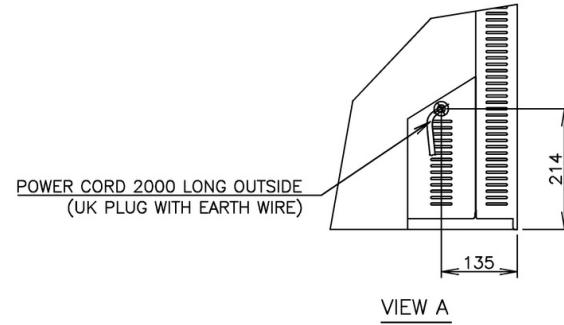






ITEM	Hoshizaki Undercounter Freezer
MODEL	FT-126MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.9kVA (4.08A)
AMPERAGE	Rated 2.6A
ELECTRIC CONSUMPTION	Motor 410W Heater 371W Refrigeration 342W Defrost 330W
HEAT REJECTION	*W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	231L
OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 850(-880) mm (H) 840mm (W) x 436mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to -7°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 72kg (Gross: Approx. 77kg)
PACKAGE	Carton 1265mm (W) x 680mm (D) x 790mm (H)
ACCESSORIES	—
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage $\pm 6\%$

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.
4. Product code: T272-C100 (HS)

# HOSHIZAKI UNDERCOUNTER FREEZER FT-126MA-S

APPROVED UJYIBO	checked WANG	DESIGNED LIANG	DRAWN ZHANG	SCALE 1/20	TRIGONOMETRY
APPROVED DESIGNED	DATE 2021.03.09	DATE 2019.03.15	DRAWING NO. D24605	SYMBOL △	SYMBOL △

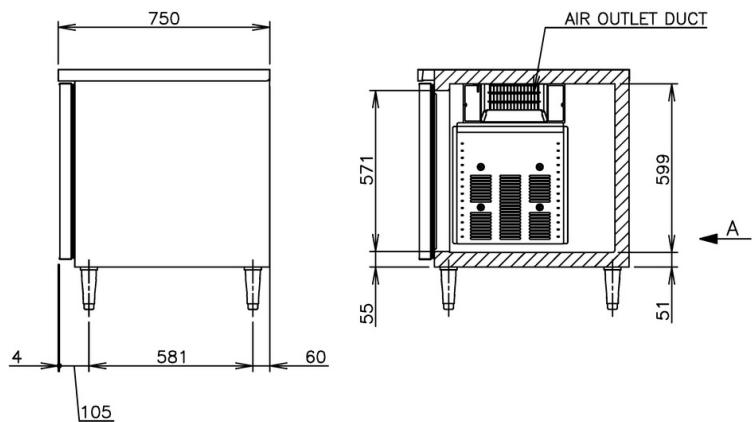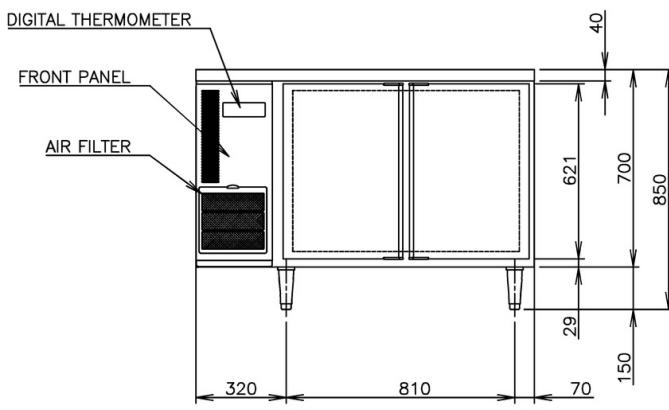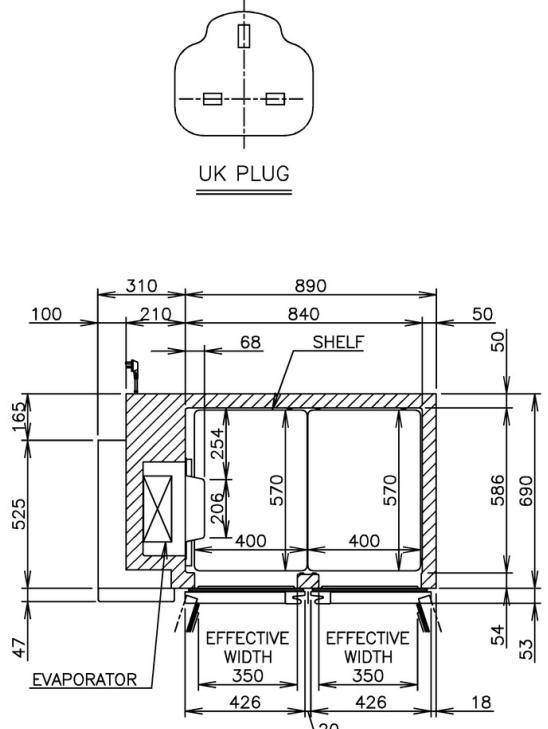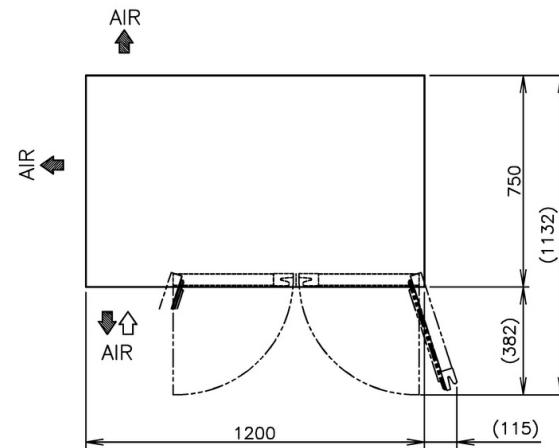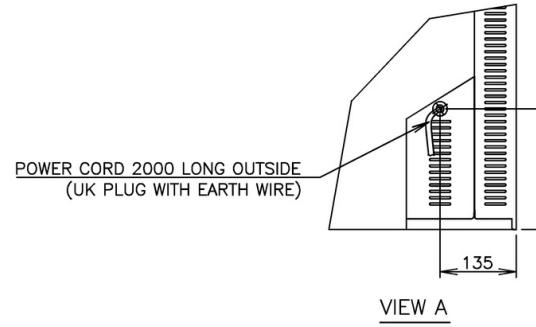

ITEM	Hoshizaki Undercounter Freezer
MODEL	FT-128MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity:0.9kVA (4.08A)
AMPERAGE	Rated 2.6A
ELECTRIC CONSUMPTION	Motor 418W Heater 371W Refrigeration 354W Defrost 330W
HEAT REJECTION	*W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	307L
OUTSIDE DIMENSIONS	1200mm (W) x 750mm (D) x 850(-880) mm (H)
INSIDE DIMENSIONS	840mm (W) x 586mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R404A
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -23 to -7°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 79kg (Gross: Approx. 84kg)
PACKAGE	Carton 1265mm (W) x 830mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -23 to -7°C is guaranteed at ambient temperature of 35°C.
4. Product code: T276-C100 (HS)

# HOSHIZAKI UNDERCOUNTER FREEZER FT-128MA-S

APPROVED	KAWAKAMI	CHECKED	WANG	DESIGNED	LIANG	DRAWN	ZHANG	SCALE	1/20	TRIGONOMETRY
UJYIBO	WX	△		2021.03.09		DATE				
APPROVED	DESIGNED	SYMBOL				DATE	2019.03.15	DRAWING NO.	D24609	SYMBOL