




## FEATURES

**Strong Refrigeration**

Designed to operate in tropicalised 43°C ambient conditions.

**Auto-close within 45°**

Automatically door-closing design with 700,000 tests.

**Drain Heater**


Standard easy install drain pan for upright models & built-in for undercounter models.

**Compact Refrigeration Unit****Front-in & Front-out air flow**

No need to leave space on the back.

**Easy Cleaning**

Removable door gaskets for easy cleaning without tools.


**Digital Display****Better Cooling Capability**





-6°C refrigerator &  
-23°C freezer.

**Hygienic Design**

Dished stainless interior and base with rounded edges for easy cleaning.

## CUSTOM MADE ITEMS






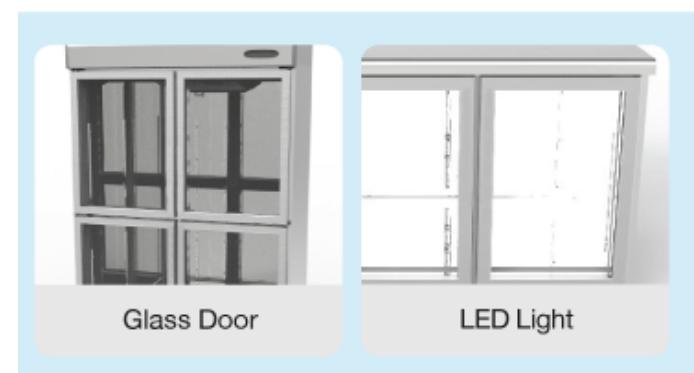


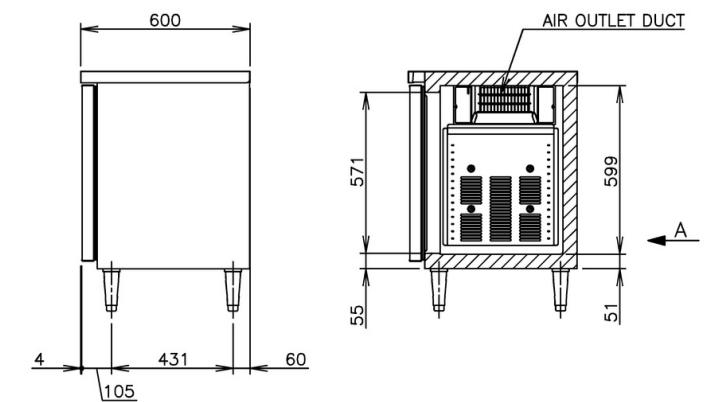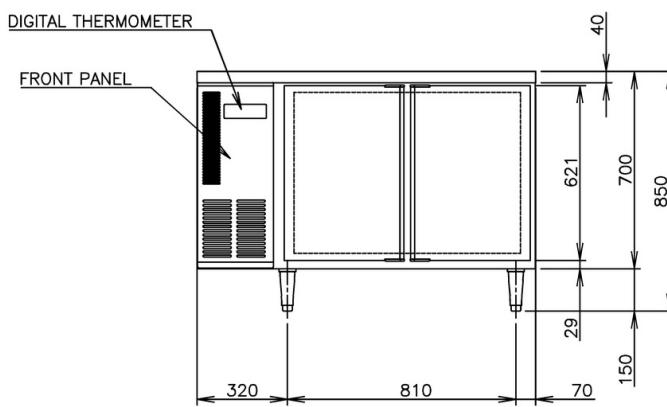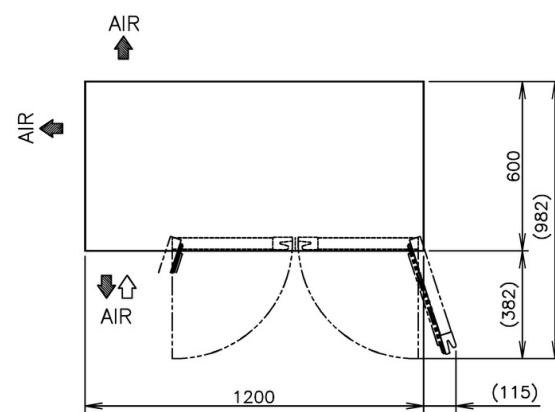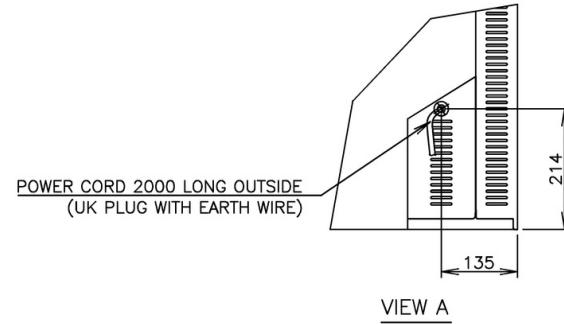

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-126MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
AMPERAGE	Rated 2.0A
ELECTRIC CONSUMPTION	Motor 240W Heater 192W Refrigeration 245W Defrost 165W
HEAT REJECTION	*W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	231L
OUTSIDE DIMENSIONS	1200mm (W) x 600mm (D) x 850(-880) mm (H) 840mm (W) x 436mm (D) x 599mm (H)
INSIDE DIMENSIONS	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
EXTERIOR	Stainless Steel, ABS Plastic (Door)
INTERIOR	Polyurethane Foam
INSULATION	Cyclopentane
INSULATION FOAM BLOWING AGENT	Forced Air Circulation
REFRIGERATION SYSTEM	Glass Tube Heater
DEFROST SYSTEM	Hermetic
COMPRESSOR	Wire and Tube type, Air-cooled
CONDENSER	Fin and Tube Type
EVAPORATOR	R134a
REFRIGERANT	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
TEMPERATURE CONTROL	Defrost Control
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net: 71kg (Gross: Approx. 76kg)
PACKAGE	Carton 1265mm (W) x 680mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage $\pm 6\%$

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.
4. Product code: T264-C100 (HS)

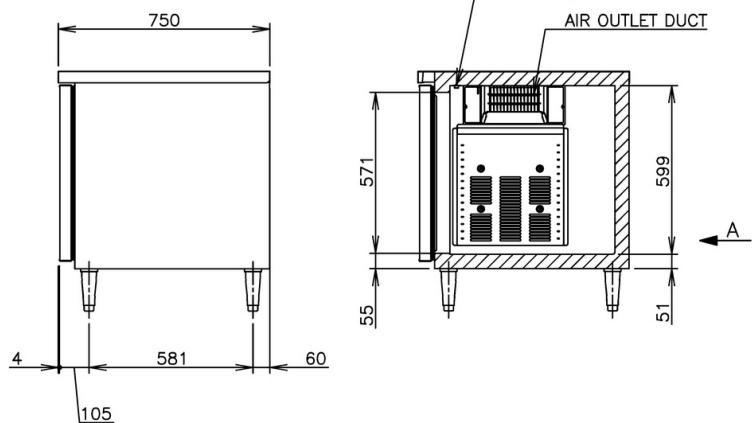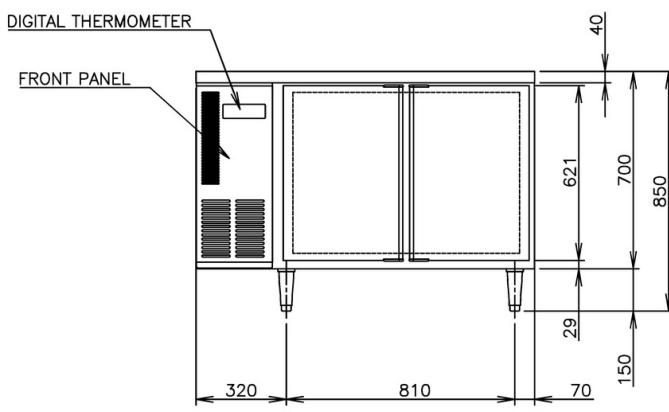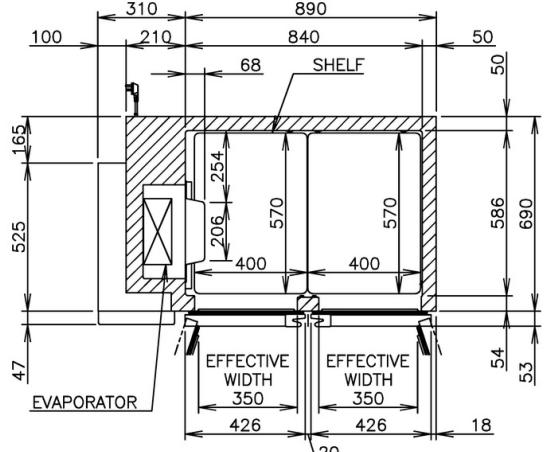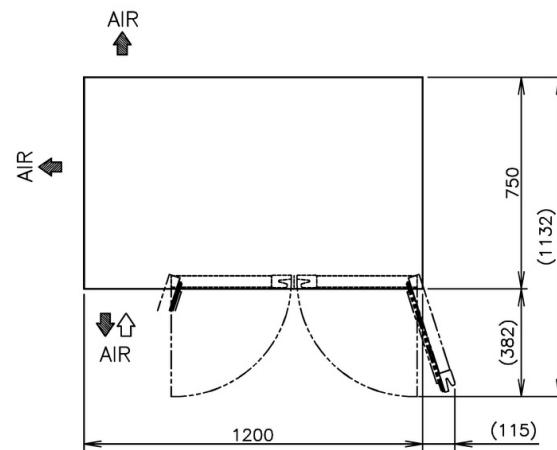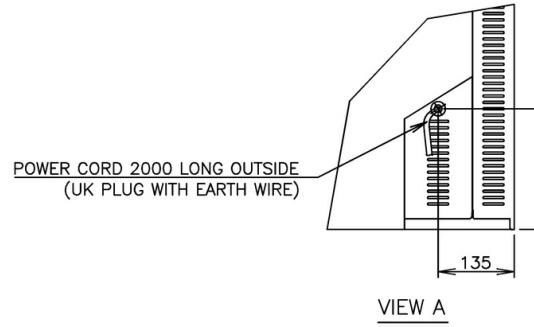

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RT-128MA-S
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
AMPERAGE	Rated 2.0A
ELECTRIC CONSUMPTION	Motor 240W Heater 187W Refrigeration 245W Defrost 165W
HEAT REJECTION	*W
POWER CORD	2.0m (UK Plug with Earth Wire)
EFFECTIVE CAPACITY	307L
OUTSIDE DIMENSIONS	1200mm (W) x 750mm (D) x 850(-880) mm (H)
INSIDE DIMENSIONS	840mm (W) x 586mm (D) x 599mm (H)
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)
INTERIOR	Stainless Steel, ABS Plastic (Door)
INSULATION	Polyurethane Foam
INSULATION FOAM BLOWING AGENT	Cyclopentane
REFRIGERATION SYSTEM	Forced Air Circulation
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic
CONDENSER	Wire and Tube type, Air-cooled
EVAPORATOR	Fin and Tube Type
REFRIGERANT	R134a
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -6 to 12°C
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
LEG	Plastic Adjustable 150 to 180mm
SHELF	4pcs.
WEIGHT	Net:78kg (Gross: Approx. 83kg)
PACKAGE	Carton 1265mm (W) x 830mm (D) x 790mm (H)
ACCESSORIES	-
OPERATING CONDITIONS	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage±6%

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.
4. Product code: T268-C106 (HS)

# HOSHIZAKI UNDERCOUNTER REFRIGERATOR RT-128MA-S

APPROVED NAGASE	CHECKED WANG	DESIGNED LIANG	DRAWN WANG	SCALE 1/20	TRIGONOMETRY
UJUMBO APPROVED	W DESIGNED	LIANG SYMBOL	WANG DATE	2021.03.09 2020.02.20	DRAWING NO. D28134 SYMBOL 1
W SYMBOL					