


NW 1008



Modular Ice Machine up to 485 kg

Item #:
Project:
Quantity:

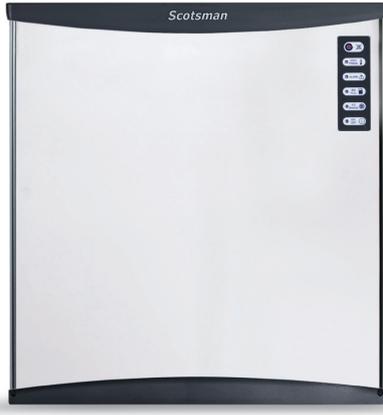

FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 1008
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 1008
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 1008
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
380/50/3

RECOMMENDED BINS

Head	Bins		kg
NW 1008	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1100	553
	●	UBH1600	812

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 485 kg


NW 1008




Modular Ice Machine up to 485 kg

Item #:
Project:
Quantity:

Modular Ice Machine up to 485 kg

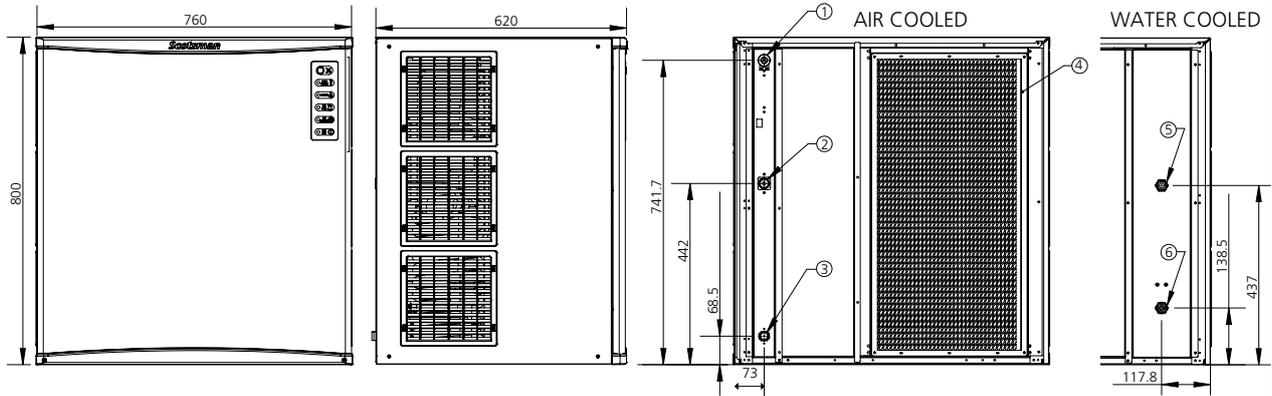


AIR FLOW

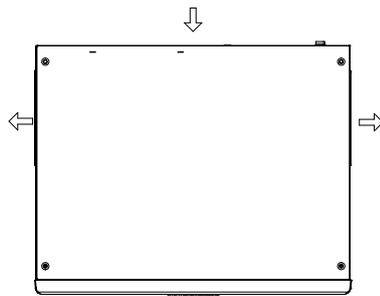

UNIT OF MEASUREMENT: mm

1. CORD SET
2. 3/4" GAS WATER INLET
3. 13/16" OD - WATER OUTLET
4. AIR INLET / AIR FILTER
5. 3/4" GAS-WATER OUTLET
6. 3/4" GAS-WATER INLET
WATER COOLED UNIT ONLY

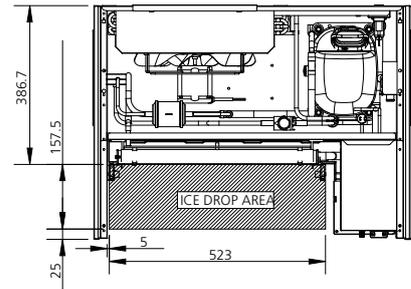

UNIT DATA	Compressor				Circuit wires		Max. fuse size				
	Version	Voltage	Btu/h	W	No.	Ømm ²	A				
Size (W x D x H)	760 x 620 x 800 mm	NW 1008 AS	230/50/1	24909	7300	5	2.5	30			
Net weight	105 kg	NW 1008 AS	380/50/3	24909	7300	5	2.5	10			
SHIPPING DATA	Carton (W x D x H)	830 x 690 x 990 mm	Weight	119 kg	NW H 1008 AS	230/50/1	24909	7300	5	2.5	30
					NW H 1008 AS	380/50/3	24909	7300	5	2.5	10
					NW L 1008 AS	230/50/1					
					NW 1008 ASR	230/50/1					
					NW 1008 ASR	380/50/3					
					NW 1008 WS	230/50/1	24909	7300	5	2.5	30
					NW H 1008 WS	230/50/1					
					NW L 1008 WS	230/50/1					

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 1008 AS	Air	230/50/1	485	456	365	13.1	45.0	22.1	2100
NW 1008 AS	Air	380/50/3	485	456	365	13.1	53.0	23.1	2500
NW H 1008 AS	Air	230/50/1	485	456	365	13.1	45.0	22.1	2100
NW H 1008 AS	Air	380/50/3	485	456	365	13.1	53.0	23.1	2500
NW L 1008 AS	Air	230/50/1							
NW 1008 ASR	Remote	230/50/1	485	456	365				
NW 1008 ASR	Remote	380/50/3	485	456	365				
NW 1008 WS	Water	230/50/1	450	445	395	12.1	48.0	136.0	2100
NW H 1008 WS	Water	230/50/1							
NW L 1008 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions