

**AF 87**

XSafe

**Self Contained Ice Machine 70 kg****Scotsman®**  
Ice Systems

Item

Project

Quantity

**FEATURES**

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

**CONDENSING SYSTEM**

Air cooled

**REFRIGERANT GAS**

R290

**VOLTAGE**  
 V/HZ/PH  
 230\50\1
**CERTIFICATIONS****OPERATING REQUIREMENTS**

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE**

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)
**Self Contained Ice Machine 70 kg**

March 2025


# AF 87 XSafe

## Self Contained Ice Machine 70 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

### Self Contained Ice Machine 70 kg

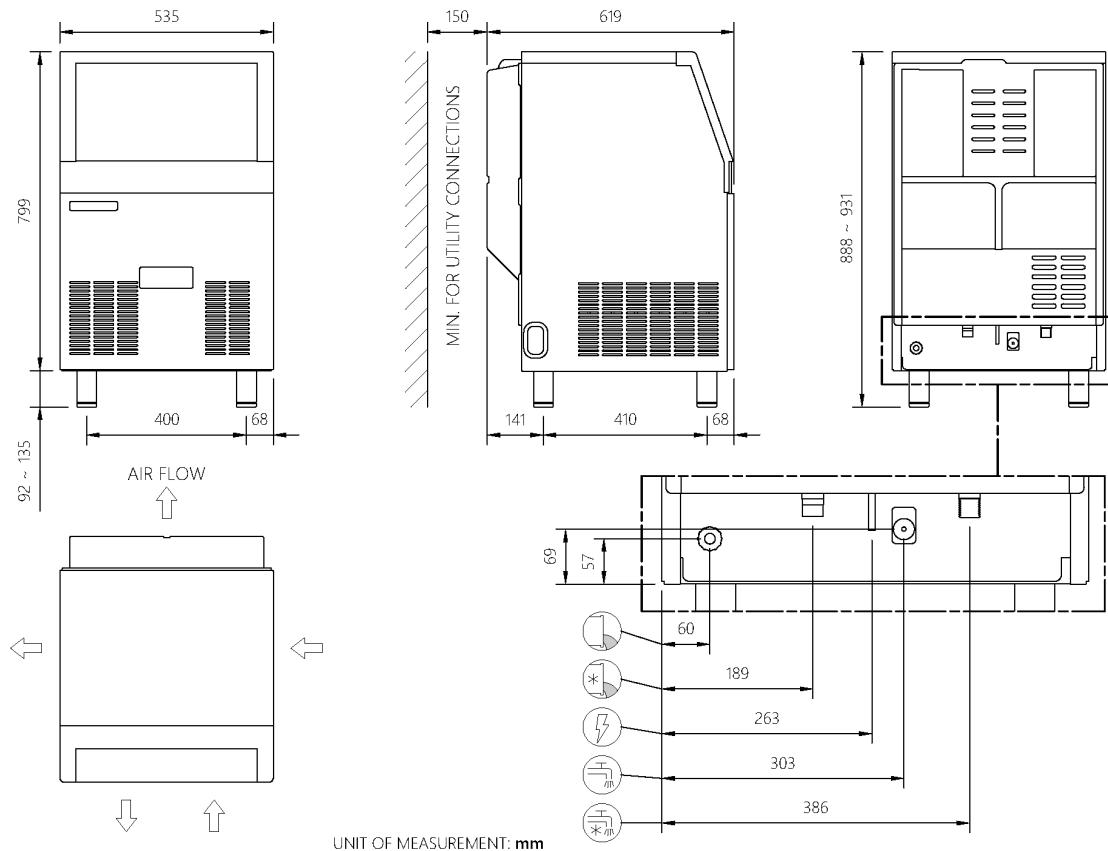

**UNIT DATA**  
Size (W x D x H) 535 x 626 x 800 mm  
Net weight 50 kg

**SHIPPING DATA**  
Size (W x D x H) 600 x 690 x 980 mm  
Gross weight 58kg

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions

			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm <sup>2</sup>	A
AF 87 AS OX	230\50\1	A	70	68	56	25	0,4	6	2	275	3 x 1,5	10