

◆ 开水篇
BOILING WATER

THE LITTLE
SMART
小迅速系列



适合
场所



选配



Microcomputer Intelligent Control
微电脑智控

节能，水位差分层步进式加热、顶上高温出水，保障开水温度；
Energy-saving, step-by-step heating by the differential water level, high-temperature water outlet on the top, to ensure the boiling water temperature;



Stepwise Heating
步进式加热

全程微电脑控制，加热、进水全自动运行，加温迅速、温控精确、出水连续、温度稳定，单位时间热出水量约 3 倍于普通开水器；

Full-process microcomputer control, automatic operation of heating and water inlet, rapid heating, precise temperature control, continuous water outlet, stable temperature, and the hot water output per unit time is 3 times that of ordinary water boilers;



Intelligent Detection & Calibration
智能检测

智能整机故障检测、按键增量补水、高平原海拔自适应温度转换功能
Intelligent whole machine fault detection, button incremental water replenishment, plateau altitude adaptive temperature conversion function




Low-water Protection
缺水保护

缺水断电、加热管防干烧、超高温断电保护多重安保 24 小时守护
24/7 multiple safety guards in low-water cut-off, heating pipe burnout protection and over-heat cut-off protection


◆ 微电脑快速电开水器（壁挂式）

MICROCOMPUTER CONTROLLED BOOSTER ELECTRIC WATER BOILER (WALL-MOUNTED)

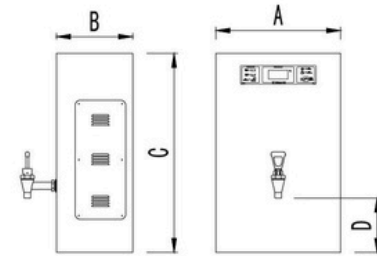


HZK-10A A: 305 B: 187 C: 466 D: 165

型号 Model	电源种类 Power Supply (Hz V)	功率 Power(kW)	电流 Current (A)	容量 Capacity(L)	产水量 (L/h) Water Output	水咀(个) Outlet	外形尺寸 Dimensions(mm) (包括水盘和水咀长度)	适合人数 (人) Suitable number(约)	颜色 colour
HZK-10A	50 220 ~	1.5	6.8	8	15	1	305*290*466	约 20	不锈钢色

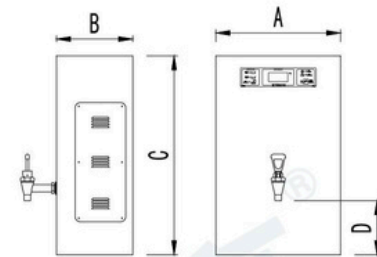

HZK-20A A: 355 B: 217 C: 566 D: 165

型号 Model	电源种类 Power Supply (Hz V)	功率 Power(kW)	电流 Current (A)	容量 Capacity(L)	产水量 (L/h) Water Output	水咀(个) Outlet	外形尺寸 Dimensions(mm) (包括水盘和水咀长度)	适合人数 (人) Suitable number(约)	颜色 colour
HZK-20A	50 220 ~	2	9.1	16	25	1	355*320*566	约 40	不锈钢色

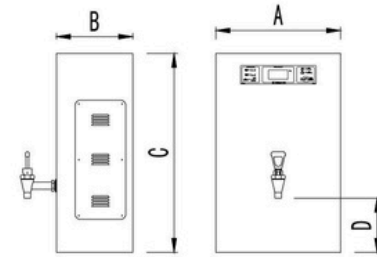

HZK-30A A: 405 B: 247 C: 616 D: 165

型号 Model	电源种类 Power Supply (Hz V)	功率 Power(kW)	电流 Current (A)	容量 Capacity(L)	产水量 (L/h) Water Output	水咀(个) Outlet	外形尺寸 Dimensions(mm) (包括水盘和水咀长度)	适合人数 (人) Suitable number(约)	颜色 colour
HZK-30A	50 220 ~	3	13.6	25	45	1	405*350*616	约 60	不锈钢色