



Self Contained Ice Machine up to 30 kg



Features

- Produces individual Gourmet crystal clear supercubes.
- Up to 30 kg (66 lb) daily ice cubes production.
- Up to 11 kg (24 lb) ice storage capacity.
- Push-button dispensing system: cubes drop directly into the consumer's glass, with no manipulation.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front access condenser air filter, removable and washable.
- Water system protected by patented anti-scale system.
- AgION antimicrobial agent embedded in moulded plastics parts.
- 3 years manufacturer warranty.
- R-134a CFC-free refrigerant.

Technologies



| Model | Compressor | 24h | | | | | | Ice Storage Capacity | Dimensions | | |
|-----------|------------|------------|------|------|------------|------|------|----------------------|------------|-----|---|
| | | 10°C: 10°C | | | 21°C: 15°C | | | | | | |
| | | [kg] | [lb] | N° | [kg] | [lb] | N° | [kg] | [lb] | N° | [WxDxH mm] |
| DXG 35 AS | | 30 | 66 | 1500 | 26 | 57 | 1300 | 11 | 24 | 550 | 380x515x1605 |
| DXG 35 WS | | 29 | 64 | 1450 | 25 | 55 | 1250 | 11 | 24 | 550 | [WxDxH inches] 15" x 20 9/32" x 63 3/16" |

[V/Hz/ph]
 230/50/1

R134a

This product qualifies for the following listings:



Medium Gourmet
20 g



Ø 29 x H 34 mm

3 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 30 kg

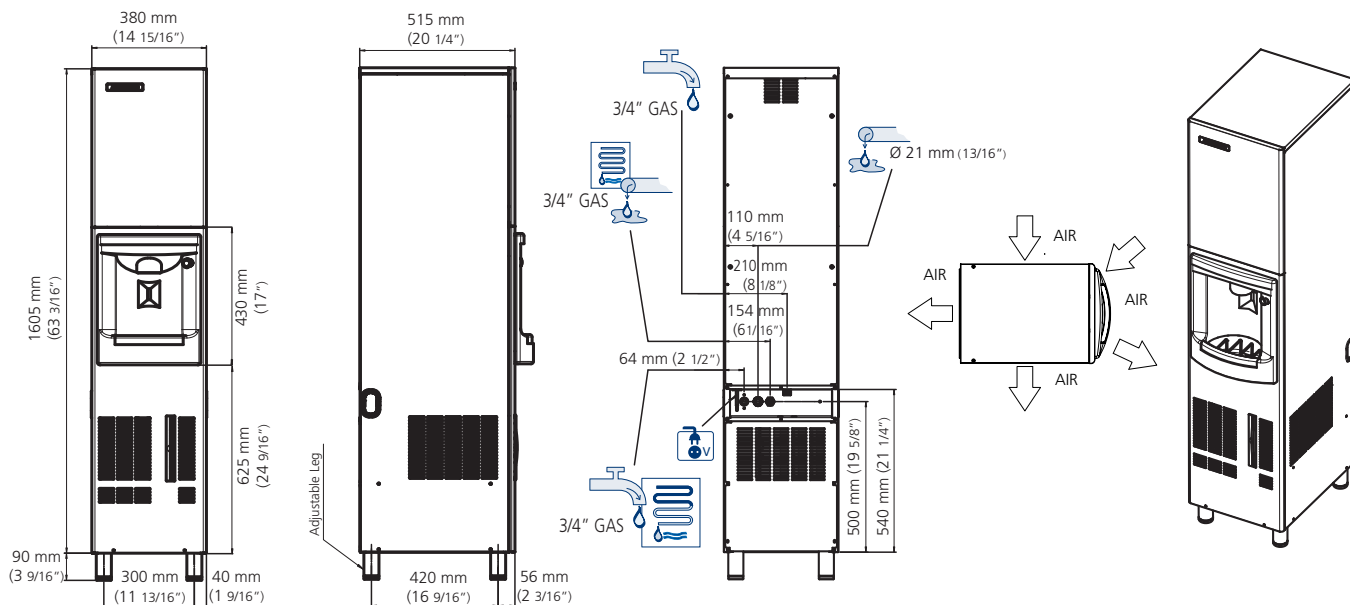

DXG AIR COOLED

| °C \ °F | °F | | | | |
|---------|-----|-----|-----|-----|----|
| | 50° | 60° | 70° | 90° | |
| 10° | 29 | 27 | 25 | 21 | kg |
| 50° | 64 | 60 | 55 | 46 | lb |
| 21° | 27 | 25 | 23 | 19 | kg |
| 70° | 60 | 55 | 51 | 42 | lb |
| 32° | 15 | 15 | 15 | 15 | kg |
| 90° | 33 | 33 | 33 | 33 | lb |
| 38° | 12 | 12 | 12 | 12 | kg |
| 100° | 26 | 26 | 26 | 26 | lb |



DXG WATER COOLED

| °C \ °F | °F | | | | |
|---------|-----|-----|-----|-----|----|
| | 50° | 60° | 70° | 90° | |
| 10° | 30 | 29 | 27 | 24 | kg |
| 50° | 66 | 64 | 60 | 53 | lb |
| 21° | 28 | 26 | 25 | 22 | kg |
| 70° | 62 | 57 | 55 | 49 | lb |
| 32° | 22 | 22 | 21 | 20 | kg |
| 90° | 49 | 49 | 46 | 44 | lb |
| 38° | 21 | 20 | 20 | 19 | kg |
| 100° | 46 | 44 | 44 | 42 | lb |



Minimum

10°C (50°F)



Maximum

43°C (104°F)

5°C (41°F)

-10%

1 bar
14 psi



+10%

5 bar
70 psi

| Model | Cooling Type | Capacity [Btu/h] [W] | Area [Ømm²] | Power [W] | FUSE | Energy [kWh] - 100 kg | Water [l/h] [gal/h] | Weight [kg] [lb] | Dimensions [kg] [lbs] |
|-----------|--------------|----------------------|-------------|-----------|------|-----------------------|---------------------|------------------|-----------------------|
| DXG 35 AS | Air Cooled | 2700 790 | 3x1,5 | 300 | 10 A | 46.6 | 2,7 1.6 | 51 112 | 60 132 |
| DXG 35 WS | Water Cooled | 2700 790 | 3x1,5 | 300 | 10 A | 30,0 | 41,7 11 | 51 112 | 60 132 |